



2X4 RETROFIT TROFFER 30W LED LAMP 95+ CRI

High Efficacy 145.6 lm/W
Dimming Options: 0-10V and
3-Step Dimming or Integrate Bluetooth
Mesh Ready



4000K




FEATURES & BENEFITS

- * Exceeds Million Lamp Challenge Phase 2 specification
- * Dimming Options: Integrated Bluetooth Mesh or 0-10V and 3-Step Dimming
- * Super Simple Installation
- * Greater than 60% savings over fluorescent
- * 10-year non-prorated warranty
- * Flicker Free

LED Green Light Model Number:
GL-2x4-Retrofit-30W-4000K-95CRI-X

Specify Dimming Option (X):
(B) Integrated Bluetooth Mesh
(0) 0-10V
(3) 3-Step Dimming

Projection view:

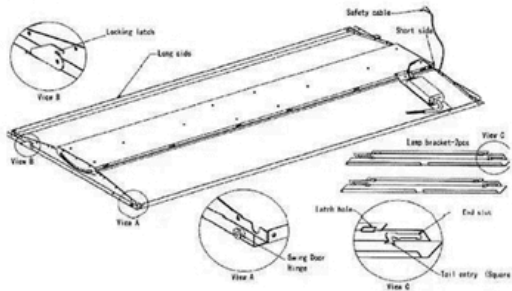

SPECIFICATIONS

| | |
|-----------------------------|--|
| Average Wattage | 30 watts |
| Luminous Efficacy | 145.6 lm/W |
| Input Voltage | 95-305 VAC |
| CCT | 4030K |
| CRI (Color Rendering Index) | 97 |
| Measured Output | 4,368 lumens |
| Illumination Angle | 180 Degrees |
| Flicker % | Flicker-Free |
| Dimensions | 47.8" x 23.7" (1213 x 603 x 45mm) |
| Life Span | 100,000 hours at 25°C or 77°F |
| Operating Temperature | -4°F -122°F (-20°C -50°C) |
| Ratings | Damp or Dry Location |
| Warranty | 10 Years Non-Prorated |
| Certification | ETL, UL |
| Driver | External Driver |
| Dimming Options | 0-10V & 3-Step Dimming or Integrated Bluetooth Mesh |
| TM-30-18 Rf | 90 |
| TM-30-18 Rg | 99 |

LEDGREENLIGHTINT.COM
PRODUCTS ARE WARRANTED ONLY TO MEET LED GREENLIGHT INTERNATIONAL'S PRODUCTION
DATA SHEET SPECIFICATIONS. PRODUCTS AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.
REV 02-2020

