



8W LED 2' T8 TUBE 95+ CRI

Efficacy 159 lm/W
External Driver-Easy Installation
Use Existing Fixtures
Type-C



5000K




FEATURES & BENEFITS

- * Exceeds Million Lamp Challenge Phase 2 specification
- * Dimming Options: Integrated Bluetooth Mesh Or 0-10V and 3-Step Dimming
- * Easy Installation - Replace Ballast with LED Driver Using existing Tombstones and Wiring
- * Dual Polarity Wiring
- * Greater than 70% savings over fluorescent tube
- * 10-year non-prorated warranty
- * Glass Tube Design - Higher Transparency
- * Available in 1,2,3 and 4 lamps/driver combinations

LED Green Light Model Number:
GL-T8-2F-C-8W-5000K-95CRI-X

Specify Dimming Option (X):
(B) Integrated Bluetooth Mesh
(0) 0-10V
(3) 3-Step Dimming

Installation Procedure:
Remove Ballast and Install LED Driver and replace Fluorescent tubes with Type-C Tube.

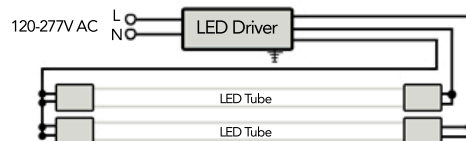

SPECIFICATIONS

Average Wattage	8.26 watts
Luminous Efficacy	159 lm/W
Input Voltage	120 - 277 VAC
CCT	5000K
CRI (Color Rendering Index)	96
Measured Output in Lumens	1,313 lumens
Illumination Angle	320 Degrees
Dimensions (MOL)	914mm x 25mm
Dimming Options	0-10V & 3-Step Dimming or Integrated Bluetooth Mesh
Operating Temperature	-4°F -122°F (-20°C -50°C)
Ratings	Dry Location
Warranty	10 Years Non-Prorated
Certification	UL, DLC, ETL, NSF
Driver	External Driver, Custom UL Class 2
Life Span	100,000 hours at 25°C or 77°F

LEDGREENLIGHTINT.COM
PRODUCTS ARE WARRANTED ONLY TO MEET LED GREENLIGHT INTERNATIONAL'S PRODUCTION
DATA SHEET SPECIFICATIONS. PRODUCTS AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.
REV 02-2020

