

# 8W LED 2' T8 TUBE

## 95+ CRI

Efficacy 159 lm/W  
 External Driver-Easy Installation  
 Use Existing Fixtures  
 Type-C



4000K




## FEATURES & BENEFITS

- \* Exceeds Million Lamp Challenge Phase 2 specification
- \* Dimming Options: Integrated Bluetooth Mesh Or 0-10V and 3-Step Dimming
- \* Easy Installation - Replace Ballast with LED Driver Using existing Tombstones and Wiring
- \* Dual Polarity Wiring
- \* Greater than 70% savings over fluorescent tube
- \* 10-year non-prorated warranty
- \* Glass Tube Design - Higher Transparency
- \* Available in 1,2,3 and 4 lamps/driver combinations

**LED Green Light Model Number:**  
 GL-T8-2F-C-8W-4000K-95CRI-X

**Specify Dimming Option (X):**  
 (B) Integrated Bluetooth Mesh  
 (0) 0-10V  
 (3) 3-Step Dimming

**Installation Procedure:**  
 Remove Ballast and Install LED Driver and replace Fluorescent tubes with Type-C Tube.

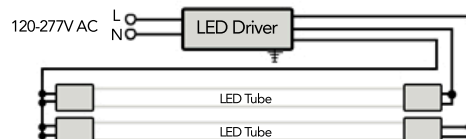

## SPECIFICATIONS

Average Wattage	8.26 watts
Luminous Efficacy	159 lm/W
Input Voltage	120 - 277 VAC
CCT	4000K
CRI (Color Rendering Index)	96
Measured Output in Lumens	1,313 lumens
Illumination Angle	320 Degrees
Dimensions (MOL)	914mm x 25mm
Dimming Options	0-10V & 3-Step Dimming or Integrated Bluetooth Mesh
Operating Temperature	-4°F -122°F (-20°C -50°C)
Ratings	Dry Location
Warranty	10 Years Non-Prorated
Certification	UL, DLC, ETL, NSF
Driver	External Driver, Custom UL Class 2
Life Span	100,000 hours at 25°C or 77°F