

15.8 W LED 4' T8 TUBE

95+ CRI

Efficacy 158.6 lm/W
 External Driver-Easy Installation
 Use Existing Fixtures
 Type-C



5000K




FEATURES & BENEFITS

- * Exceeds Million Lamp Challenge Phase 2 specification
- * Dimming Options: Integrated Bluetooth Mesh Or 0-10V and 3-Step Dimming
- * Easy Installation - Replace Ballast with LED Driver Using existing Tombstones and Wiring
- * Dual Polarity Wiring
- * Greater than 60% savings over fluorescent tube
- * 10-year non-prorated warranty
- * Glass Tube Design - Higher Transparency
- * Available in 1,2,3 and 4 lamps/driver combinations

LED Green Light Model Number:
 GL-T8-4F-C-15W-5000K-95CRI-X

Specify Dimming Option (X):
 (B) Integrated Bluetooth Mesh
 (0) 0-10V
 (3) 3-Step Dimming

Installation Procedure:
 Remove Ballast and Install LED Driver and replace Fluorescent tubes with Type-C Tube.

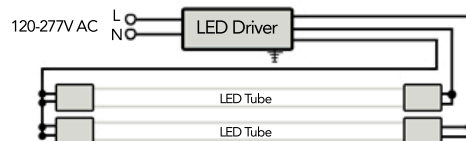

SPECIFICATIONS

Average Wattage	15.8 watts
Luminous Efficacy	158.6 lm/W
Input Voltage	120 - 277 VAC
CCT	5000K
CRI (Color Rendering Index)	96
Measured Output in Lumens	2,506 lumens
Illumination Angle	320 Degrees
Dimensions (MOL)	914mm x 25mm
Dimming Options	0-10V & 3-Step Dimming or Integrated Bluetooth Mesh
Operating Temperature	-4°F -122°F (-20°C -50°C)
Ratings	Dry Location
Warranty	10 Years Non-Prorated
Certification	UL, DLC, ETL, NSF
Driver	External Driver, Custom UL Class 2
Life Span	100,000 hours at 25°C or 77°F